

TKV-068-TB38-CFK-MODUL-BLACK

InduDur™




SPECIFICATION KEYBOARD

Number of keys: 68
 Keyswitch technology: Carbon-on-gold-contact
 Operation force: 1,0 N
 Actuation travel: 1,5 mm
 Durability: ca. 10 Mil. operations
 Protection level (max): IP65 (front side)
 Mounting type: Front panel with mounting studs (rear side)
 Material (front panel): Carbon
 Interfaces: PS/2; USB
 Operating temperature: -40 °C bis +90 °C
 Weight: 800 g
 Cabel length (min.): 2,20 m

DIMENSIONS KEYBOARD

Length: 375,0 mm
 Width: 125,0 mm
 Height: 40,7 mm

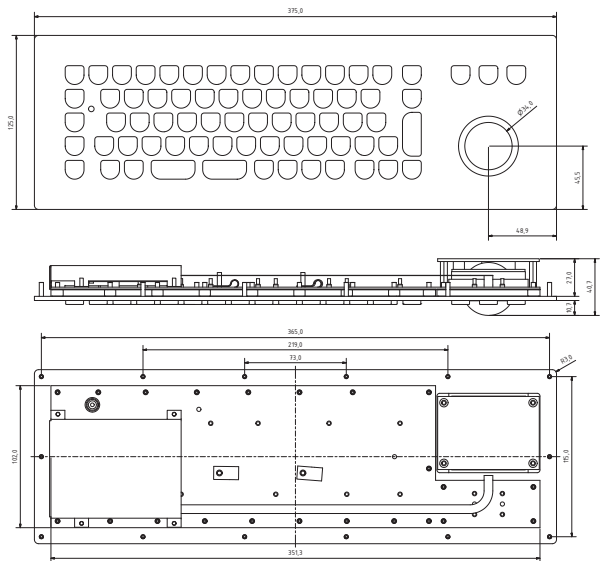

SPECIFICATION TRACKBALL

Ball diameter: 38 mm
 Ball material: Phenolic Resin
 Technology: mechanic
 Protection level (max): IP65 static (IP54 dynamic)



GENERAL HINT


The maximum starting torque of the mounting studs is 15 Ncm!

Ordering data:		Interface		Layout	
Cat.-No.	Product name	PS/2	USB	DE	US
KV16224	TKV-068-TB38-CFK-MODUL-BLACK-PS/2-DE	•		•	
KV16225	TKV-068-TB38-CFK-MODUL-BLACK-PS/2-US	•			•
KV16226	TKV-068-TB38-CFK-MODUL-BLACK-USB-DE		•	•	
KV16227	TKV-068-TB38-CFK-MODUL-BLACK-USB-US		•		•
KY13003	TKV-068-TB38V-MODUL-GASKET	Gasket			

Other language versions / interfaces / configurations available on request.

Errors and omissions excepted

Dimens. Drawing: TKV-068-TB38-CFK-MODUL

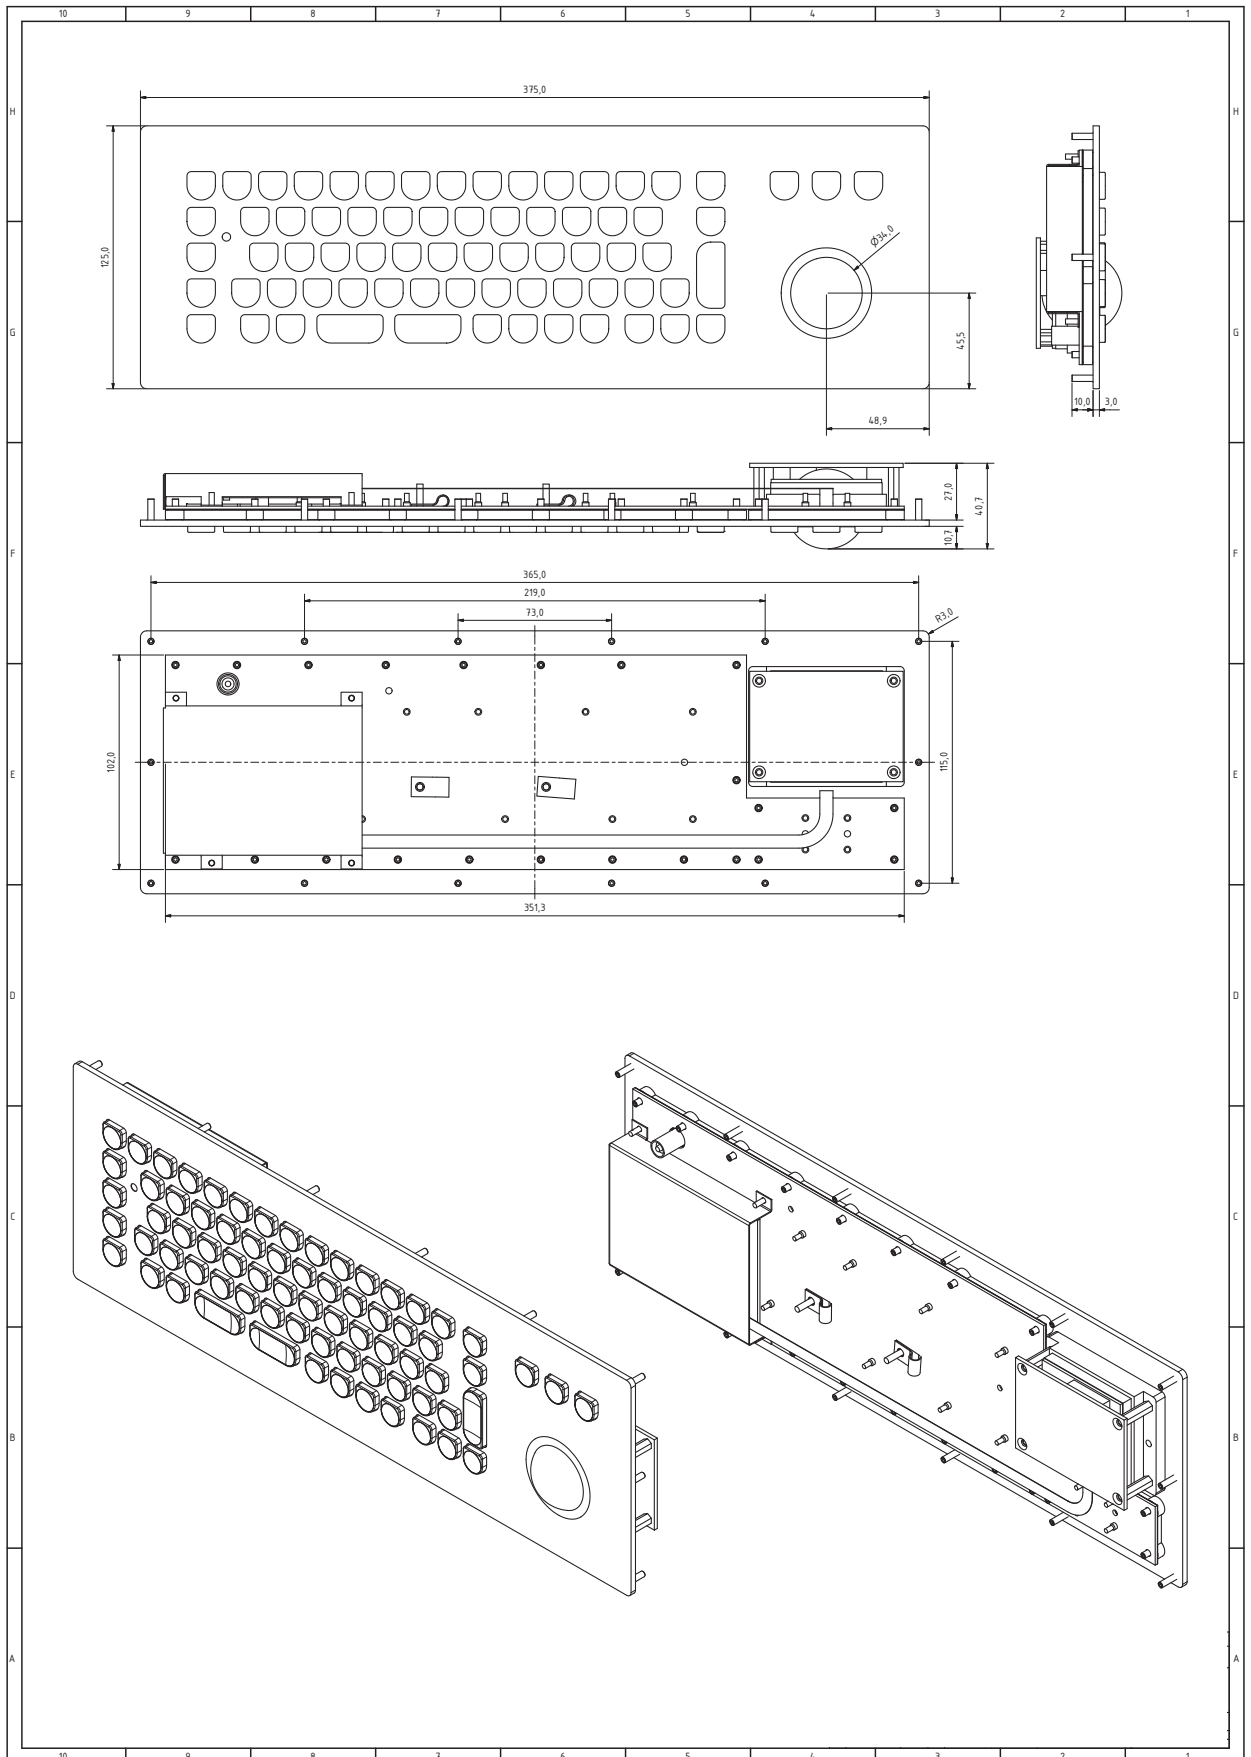

Errors and omissions excepted